




E3W-1 #1000-0077 CVT Trans, P/S and Diff Fluid Service Specification

- A self-contained CVT Trans + Power Steering and/or Gear fluid service equipment.
- 110vac fused power converted to precise 12vdc ops.
- 22ft. Heavy Duty - 110vac power cable with holder attached to the cabinet.
- Easy to use and understand electric switch control.
- 4 GPM Fill Pump for CVT Fluid, and a 4 GPM Fill Pump for Gear Oils and Power Steering Fluids.
- 2 gal. **New CVT Only** Fluid tank, front visible, top filled.
- Receptacle for insert of 64oz. bottles of, New Gear Oil or New Power Steering Fluid.
- 3.3 GPM rated vacuum pump for use with all 3 fluids.
- 6 foot heavy duty braided Power Steering, Gear Oil and CVT Transmission fluid vacuum hose.
- Separate 7 foot heavy duty Fill Hose for P/S and Gear oil.
- Separate 7 foot heavy duty Fill Hose for CVT Transmission Fluid.
- Separate system for CVT Trans and PS/Gear Fluids.
- 1 – 2.5G marked waste tanks- Service Tank in top receptacle.
- 4 ft each .187", .232" and .275" id service tubes.
- Trans service control Manifold.
- Hose drain reservoir for Dip Stick hoses.
- Industrial grade polyethylene Equipment cabinet with built in sturdy handle.
- Locking front swivel and large 8" heavy duty rear wheels.

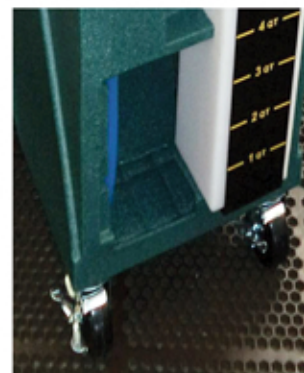

<u>Machine Dimensions</u>	<u>Machine Weight: 65lbs</u>
Height: 48 1/2in	Shipping Weight: 105lbs
Depth: 27in	
Width: 19in	